


ISDN PATCH PANEL UTP 6u

單位:mm

產品編號 : 19680

產品品名 : 3A-ISDN-50BKC�50S646Z

台製 3ANET ISDN RJ21 整合式 1U 19吋 50 Ports 跳線面板 Patch Panel 黑色

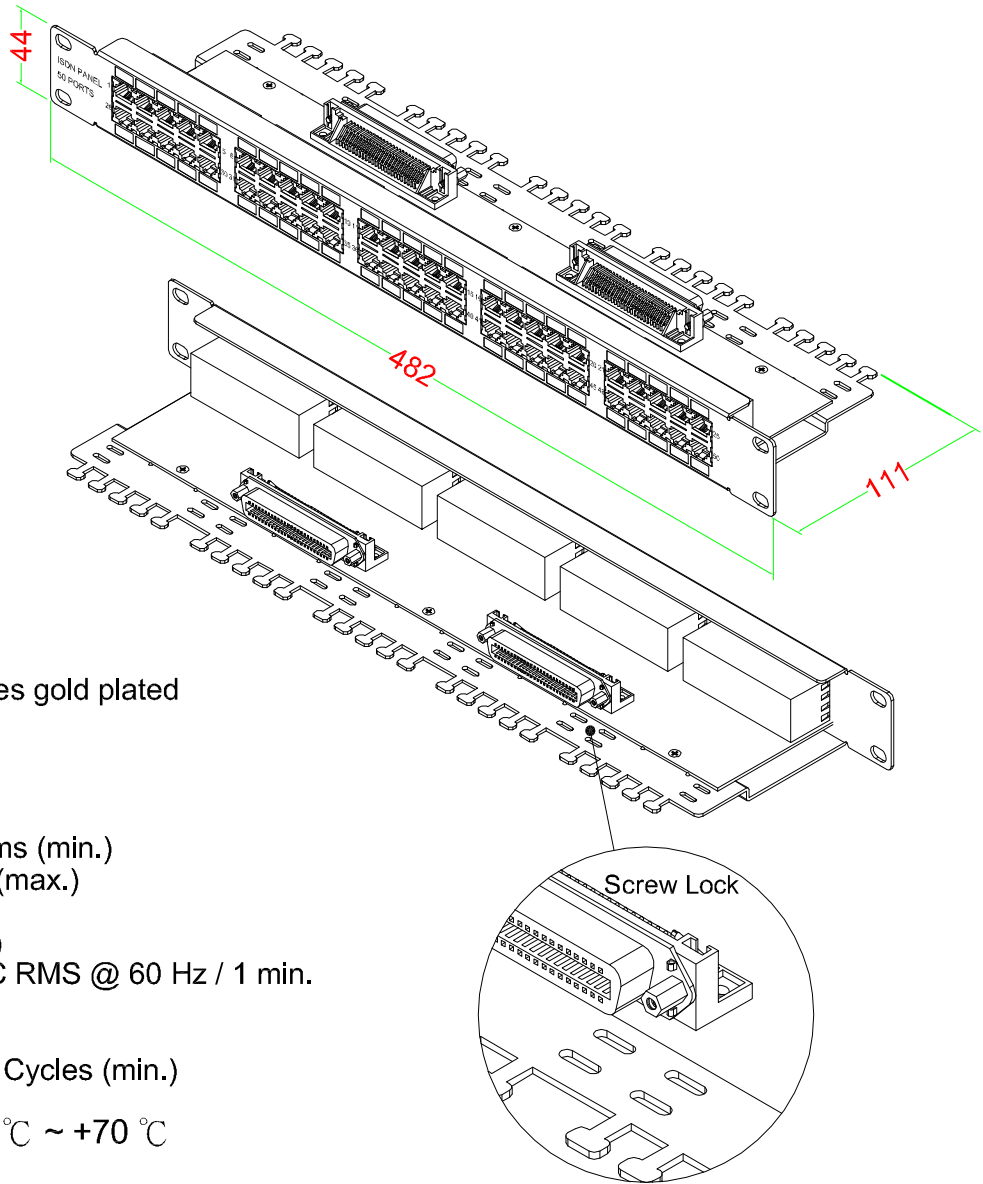

Performance:
Meets C3 Standard.

Materials:

Panel : Metal (SPCC)
Jack : 6P4C 6 micro inches gold plated
Centronic : 50 pin gold flash
PCB : FR-4 / UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps.
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60 Hz / 1 min.

Mechanical Specifications:

Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

3A-ISDN-50BKC�50S646Z

CN-50-F-1		CN-50-F-2	
CN50 — 6P	PORT	CN50 — 6P	PORT
26 — 3 1 — 4	1	26 — 3 1 — 4	26
27 — 3 2 — 4	2	27 — 3 2 — 4	27
28 — 3 3 — 4	3	28 — 3 3 — 4	28
29 — 3 4 — 4	4	29 — 3 4 — 4	29
30 — 3 5 — 4	5	30 — 3 5 — 4	30
31 — 3 6 — 4	6	31 — 3 6 — 4	31
32 — 3 7 — 4	7	32 — 3 7 — 4	32
33 — 3 8 — 4	8	33 — 3 8 — 4	33
34 — 3 9 — 4	9	34 — 3 9 — 4	34
35 — 3 10 — 4	10	35 — 3 10 — 4	35
36 — 3 11 — 4	11	36 — 3 11 — 4	36
37 — 3 12 — 4	12	37 — 3 12 — 4	37
38 — 3 13 — 4	13	38 — 3 13 — 4	38
39 — 3 14 — 4	14	39 — 3 14 — 4	39
40 — 3 15 — 4	15	40 — 3 15 — 4	40
41 — 3 16 — 4	16	41 — 3 16 — 4	41
42 — 3 17 — 4	17	42 — 3 17 — 4	42
43 — 3 18 — 4	18	43 — 3 18 — 4	43
44 — 3 19 — 4	19	44 — 3 19 — 4	44
45 — 3 20 — 4	20	45 — 3 20 — 4	45
46 — 3 21 — 4	21	46 — 3 21 — 4	46
47 — 3 22 — 4	22	47 — 3 22 — 4	47
48 — 3 23 — 4	23	48 — 3 23 — 4	48
49 — 3 24 — 4	24	49 — 3 24 — 4	49
50 — 3 25 — 4	25	50 — 3 25 — 4	50