


ISDN PATCH PANEL UTP 6u

單位 : mm

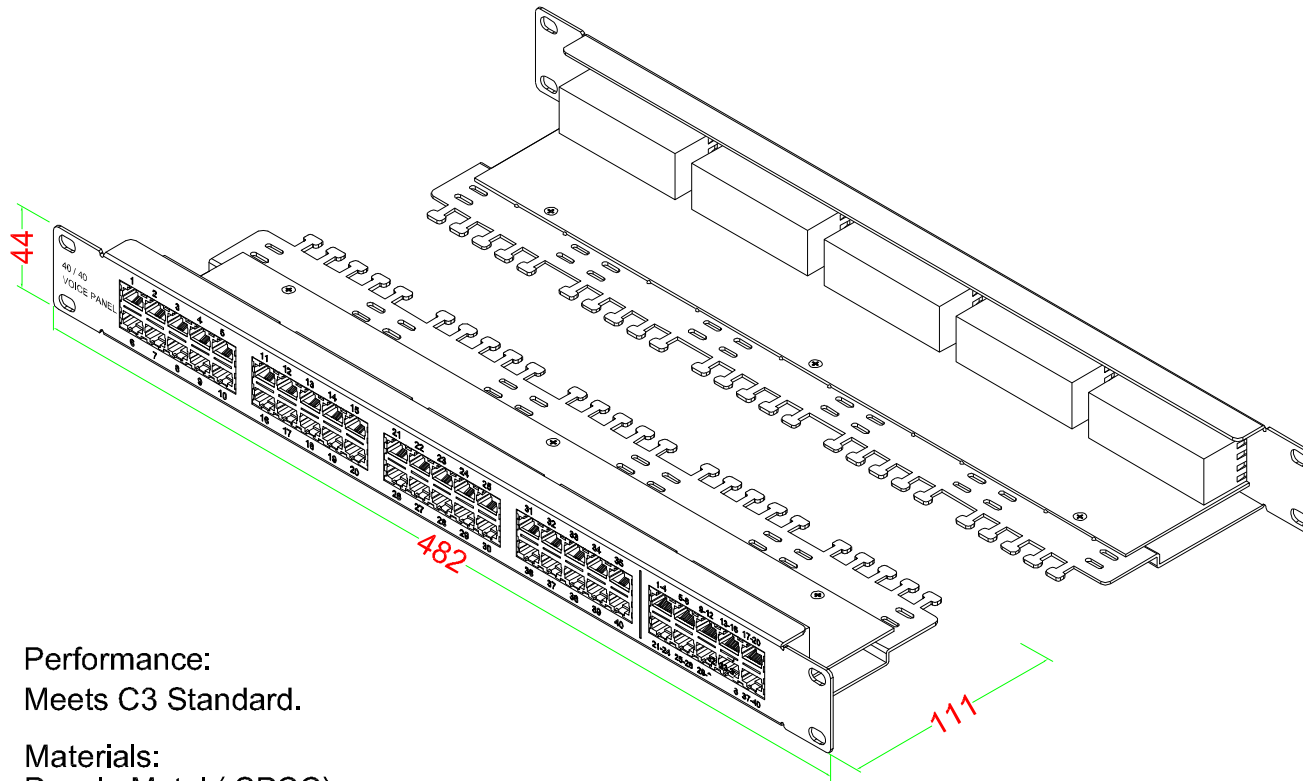

Performance:
Meets C3 Standard.

Materials:

Panel : Metal (SPCC)
Jack : 8P4C 6 micro inches gold plated
Jack : 8P8C 6 micro inches gold plated
PCB : FR-4 / UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps .
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

產品編號 : 19690

產品品名 : 3A-ISDN-50BK84886Z

台製 3ANET ISDN RJ45 整合式
1U 19吋 40 Ports 跳線面板 Patch Panel 黑色

PORT	OUT 8P4C	IN 8P8C	PORT	OUT 8P4C	IN 8P8C
1	4 — 5	5 — 4	21	4 — 5	5 — 4
2	4 — 5	6 — 3	22	4 — 5	6 — 3
3	4 — 5	7 — 2	23	4 — 5	7 — 2
4	4 — 5	8 — 1	24	4 — 5	8 — 1
5	4 — 5	5 — 4	25	4 — 5	5 — 4
6	4 — 5	6 — 3	26	4 — 5	6 — 3
7	4 — 5	7 — 2	27	4 — 5	7 — 2
8	4 — 5	8 — 1	28	4 — 5	8 — 1
9	4 — 5	5 — 4	29	4 — 5	5 — 4
10	4 — 5	6 — 3	30	4 — 5	6 — 3
11	4 — 5	7 — 2	31	4 — 5	7 — 2
12	4 — 5	8 — 1	32	4 — 5	8 — 1
13	4 — 5	5 — 4	33	4 — 5	5 — 4
14	4 — 5	6 — 3	34	4 — 5	6 — 3
15	4 — 5	7 — 2	35	4 — 5	7 — 2
16	4 — 5	8 — 1	36	4 — 5	8 — 1
17	4 — 5	5 — 4	37	4 — 5	5 — 4
18	4 — 5	6 — 3	38	4 — 5	6 — 3
19	4 — 5	7 — 2	39	4 — 5	7 — 2
20	4 — 5	8 — 1	40	4 — 5	8 — 1

